




<b>Frame</b>	PVC
<b>Lens</b>	Polycarbonate (60650, 60653) thickness: 2.3 mm Acetate (60655) thickness: 1.0 mm
<b>Protection</b>	Soft frame goggle with in-direct ventilation and visor for additional protection
<b>Weight</b>	172 g

Reference	Frame colour	Lens colour	Features	Frame Marking	Lens Marking	Lens Norms
 60650	Smoke frame and Smoke visor	Clear	Anti-fog coating	BT 34	2-1.2/ 1BT N	EN166 EN170
 60653	Smoke frame with sponge and elastic headband	Clear	Anti-fog coating	BT 34	2-1.2/ 1BT N	EN166 EN170
 60655	Smoke frame with rubber headband	Clear	Anti-fog coating	FT 34	2-1.2/ 1FT N	EN166 EN170

## Packaging & Storing

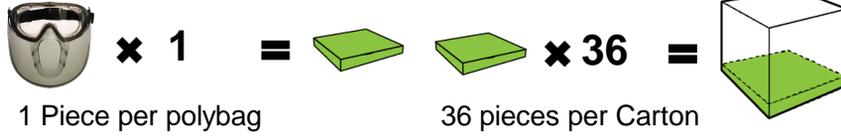

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

## 36 Pieces in 1 Carton

## Product Standards


This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0776  
Delivered by INSPEC (notified body n° NB 0194)**



This model is in conformity with the standard EN 166:2001

## General Norms Explanation

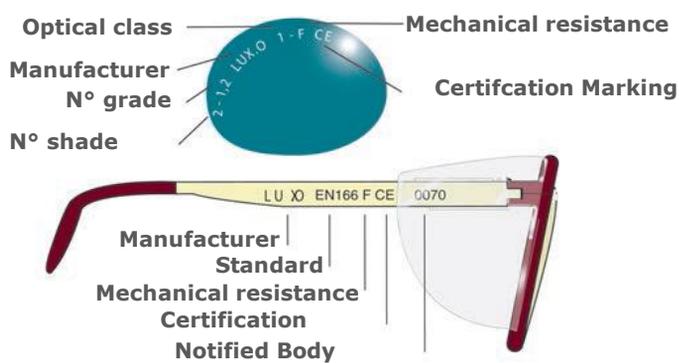

Hard coated lens	K
Anti-fog coated lens	N
Temperature between -5° (± 2°) & 55° (± 2°)	T
Protection against liquids	3
Protection against big dusts	4
Enhanced solidity	S

EN 166	Specification (optical quality, resistance to usual and mechanical risks and to impacts)
EN 169	Welding Filters
EN 170	Ultraviolet filters
EN 172	Sunglare filters for industrial use
EN 175	Welding equipments
EN 379	Welding filters with variable shade or dual shade
EN 1731	Mesh faceshield
EN 1836	Sunglare filters for leisure and sport.
EN 12312-1	Sunglasses and related eyewear : Sunglasses for general use