

23/04/2014



## FFP2 Shell mask without valve



Colors	Ref.
White	23211

### General Description / Materials



- ✓ FFP2 Shell mask without valve
- ✓ Filter media in melt-blown electrostatic polypropylene
- ✓ Outer layer in polypropylene SMS
- ✓ Inner layer in polyester
- ✓ Tightening synthetic latex free rubber elastic
- ✓ Aluminum nose piece
- ✓ Nose cushion in polyethylene foam

### Areas of use



23/04/2014

## Packaging

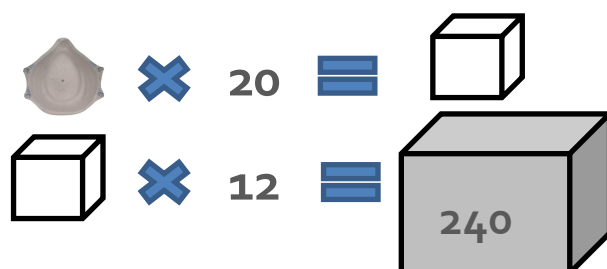

A	13.3 cm
B	21.0 cm
C	13.3 cm

## Specific Advantages

- ⊕ To avoid to breath bad particules
- ⊕ Protection against low toxic solid and liquid aerosols in concentrations up to 10xOEL
- ⊕ Protect against calcium carbonate, china clay, cement, cellulose, sulfur, cotton, flour, carbon, ferrous metal, hardwood, glass fibers, plastic, vegetable oils nine, metal dust and smoke, viruses and enzymes. and mineral oils, quartz, copper, aluminum, bacteria, fungi and mycobacterium tuberculosis, chromium, manganese, nickel, platinum, strychnine
- ⊕ Specially used in textile industry, craft industry, metallurgical industry, mining industry, underground civil engineering, woodwork, welding, melting, metal cutting out, hospital, laboratories, medical controls.

## Standards

This mask is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate 593787**

Delivered by BSI (notified body n° 0086)

EN149 2001+A1 2009

