

PRODUCT DESCRIPTION

STELLER TROUSERS


Material : 98% Cotton, 2% Antistatic

350
g/m²




SIZE	40 / 42 S	44 / 46 M	48 / 50 L	52 / 54 XL	56 / 58 XXL	60 / 62 XXXL
STELLER TROUSERS NAVY	8MSTTNS	8MSTTNM	8MSTTNL	8MSTTNXL	8MSTTNXXL	8MSTTNXXXL

PACKING



Individual
Packing



X 10



Carton

10 Pieces In
1 Carton

DESIGN & TECHNICITY

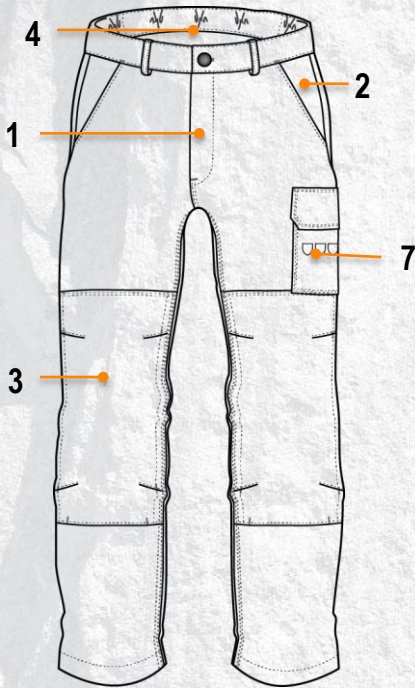

1. Fasteners

- Zipper fasteners

2. Pockets

- 2 back pockets with flaps fastened with press buttons
- 2 Italian pockets
- 1 cargo pocket with flaps fastened by press buttons
- 1 tool pocket with an opening of 7 cm



3. Knee pockets

- 2 knee pockets with adjustable height and bottom opening



4. Tagging collar

- 1 tagging collar at the waist



5. Waist

- Elastic waist with loops at the waist for a belt





6. Hem

- Removable 5 CM hem



7. Icons

- Icons for the standards on the cargo pocket

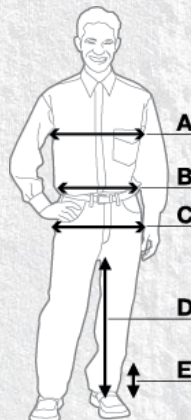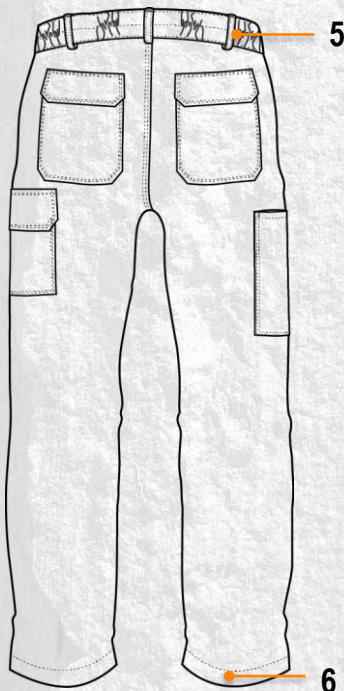

	XS	S	M	L	XL	XXL	XXXL	XXXXL								
	0	1	2	3	4	5	6	7								
	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66
A	81	88	89	96	97	104	105	112	113	120	121	128	129	136	137	144
B	69	76	77	84	85	92	93	100	101	108	109	116	117	124	125	132
C	85	92	93	100	101	108	109	116	117	124	125	132	133	140	141	147
D	78	80	80	82	82	84	84	86	86	88	88	90	90	92	92	94
E	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5



The XComfort is a range based on flame retardant solution that gives the cotton fiber fabrics a durable flame retardant finish.

This flame retardant finish is not a coating, it is a chemical bonding with the molecular structure of natural cotton. In the event that the fabric is exposed to fire a carbon char is formed, this carbon char works as a heat shield and also controls the spread of the flame.

This fabrics offer its users a superior comfort Its inherent softness is enhanced by its ability to keep the wearer cool in hot climates, and warm in cold.

STANDARDS

This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0161/3840/14
Delivered by AITEX (notified body n° 0161)**

**EN ISO 11612 : 2008
A1 + A2, B1, C1, E3, F1**



- Limited flame spread = **A1 + A2**
- Insulation against convective heat = **B1**
- Insulation against radiant heat = **C1**
- Insulation against the iron spatter = **E3**
- Insulation against contact heat = **F1**

**IEC 61482-2:2009
Class 1 – 4kA**



- Against the risk of burn provoked by an electrical arch = **4kA (Class 1)**

**EN ISO 11611:2007
Class 2 – A1 & A2**



- **(A1 and A2)** against burns from welding and similar processes **(Class 2) = Class 2 – A1 & A2**

EN 1149-5: 2008



- Against the risk of accumulation of electrostatic loads

**EN 14404: 2004+A1:2010
Type 2**



- Mechanical protection for users working in knees position = **Type 2**



This model is in conformity with the standard **EN 13688 : 2013**

Washing instructions*:



* Consult the manufacturer before any operation