




CODICE FILTRO: UL-1005

Filtro	Filtro contro radiazioni laser e di allineamento
Colore	Verde
Materiale	Policarbonato
Trasmittanza luminosa	33%
Laser guida di puntamento T%(λ) >10%	470-650 nm

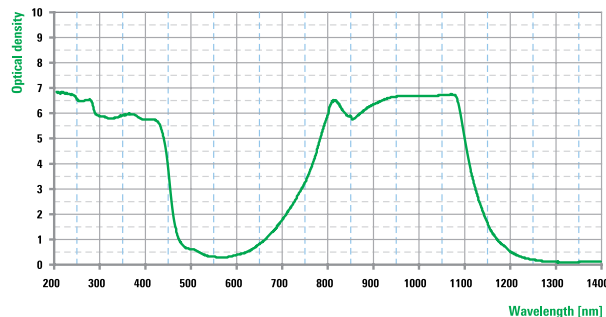

MODEL	561	562	559G	546	5X7	616L
FRAME STYLE						
ITEM CODE	○ 561H.00.00.309 ● 561H.00.01.309	○ 562S.00.00.309 ● 562S.00.01.309	559G.00.00.309	546L.00.10.551	5X7L.00.00.651	NOT AVAILABLE

Wavelength	OD	561	562	559G
190 315	7	D LB7 IR LB4	D LB7 IR LB4	D LB7 IR LB4
315 430	5	DIR LB5	DIR LB5	DIR LB5
750 1100	3	DIR LB3	DIR LB3	DIR LB3
775 1100	4	DIR LB4	DIR LB4	DIR LB4
790 1090	5	DIR LB5	DIR LB5	DIR LB5
920 1075	6	DIR LB6 M LB6Y	DIR LB6 M LB6Y	DIR LB6 M LB6Y
1000 1070	7	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y	D LB6 IR LB7 M LB7Y
1030 1065	8	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y	D LB6 IR LB8 M LB8Y
9000 11000	6	DI LB4	DI LB4	DI LB4

Wavelength	OD	546
660 690	1	0.01 W 2E-6J 660-690 RB1
745 1115	3	DIR LB3
770 1100	4	DIR LB4
785 1085	5	DIR LB5
800 825	6	DIR LB6
885 1075	6	DIR LB6
1000 1070	7	D LB6 IR LB7 M LB7Y
1030 1065	8	D LB6 IR LB8 M LB7Y
9000 11000	6	DI LB4

Wavelength	OD	5X7
660 675	1	0.01 W 2E-6J 660-675 RB1
675 690	2	0.1 W 2E-5J 675-690 RB2
715 1120	3	DIR LB3
730 1115	4	DIR LB4
745 1110	5	DIR LB5
760 1105	6	DIR LB6 M LB6Y
780 1100	7	D LB6 IR LB7 M LB7Y
790 1090	8	D LB6 IR LB8 M LB8Y
9000 11000	6	DI LB4