


WARM250/50D2

G3A LINE

THERMAL PROTECTION

- Glass industry:
Hot interventions on fibre glass dies
- Remove plates from the oven

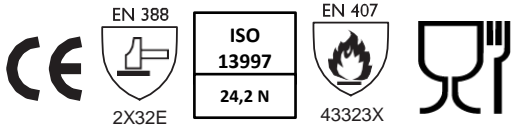

ISO 13997	A	B	C	D	E	F
Cutting load in Newtons	≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30

AET N°0075/011/162/06/19/1894 – EXT 01/06/19
(CTC LYON)

STANDARDS (DETAILS ON WEB SITE)
www.rostaing.com/normes-securite

SIZES



COMPOSITION

Glove Silicone coated para-aramid/polyamide
Full lining Para-aramid felt and acrylic/cotton fleece
Total length 50 cm

CARE



PACKAGING

Bag of 1 pair - Box of 20 pairs

PRO•LINE:
Our selection

PRO•ONE:
Available by hand



No heat shrinkage



Forearm protection

Total length
50 cm



Heat resistance

Thermal insulation :
350°C for 15 seconds
minimum

Silicone coated
para-aramid/polyamide



**Excellent cut
resistance**

Full para-aramid and
acrylic/cotton fleece lining



Water repellent
for liquids and hot
vapours